




# Multi Video Door Camera

Model No. DRC-4DB,4DC

**COMMAX**

Blooming Life, HomeNetwork

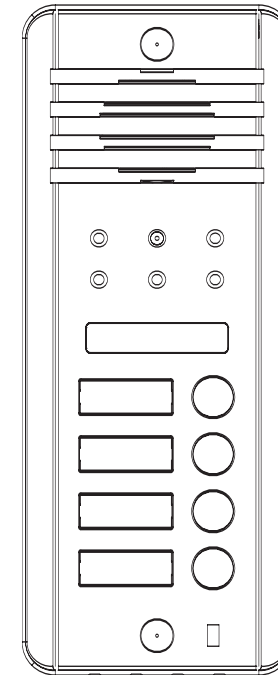

## COMMAX Co.,Ltd.


513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea  
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133  
Web site : [www.commax.com](http://www.commax.com)

Printed In Korea / 2008.07


## COMMAX Co.,Ltd.

- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

## 5. Hole Drilling

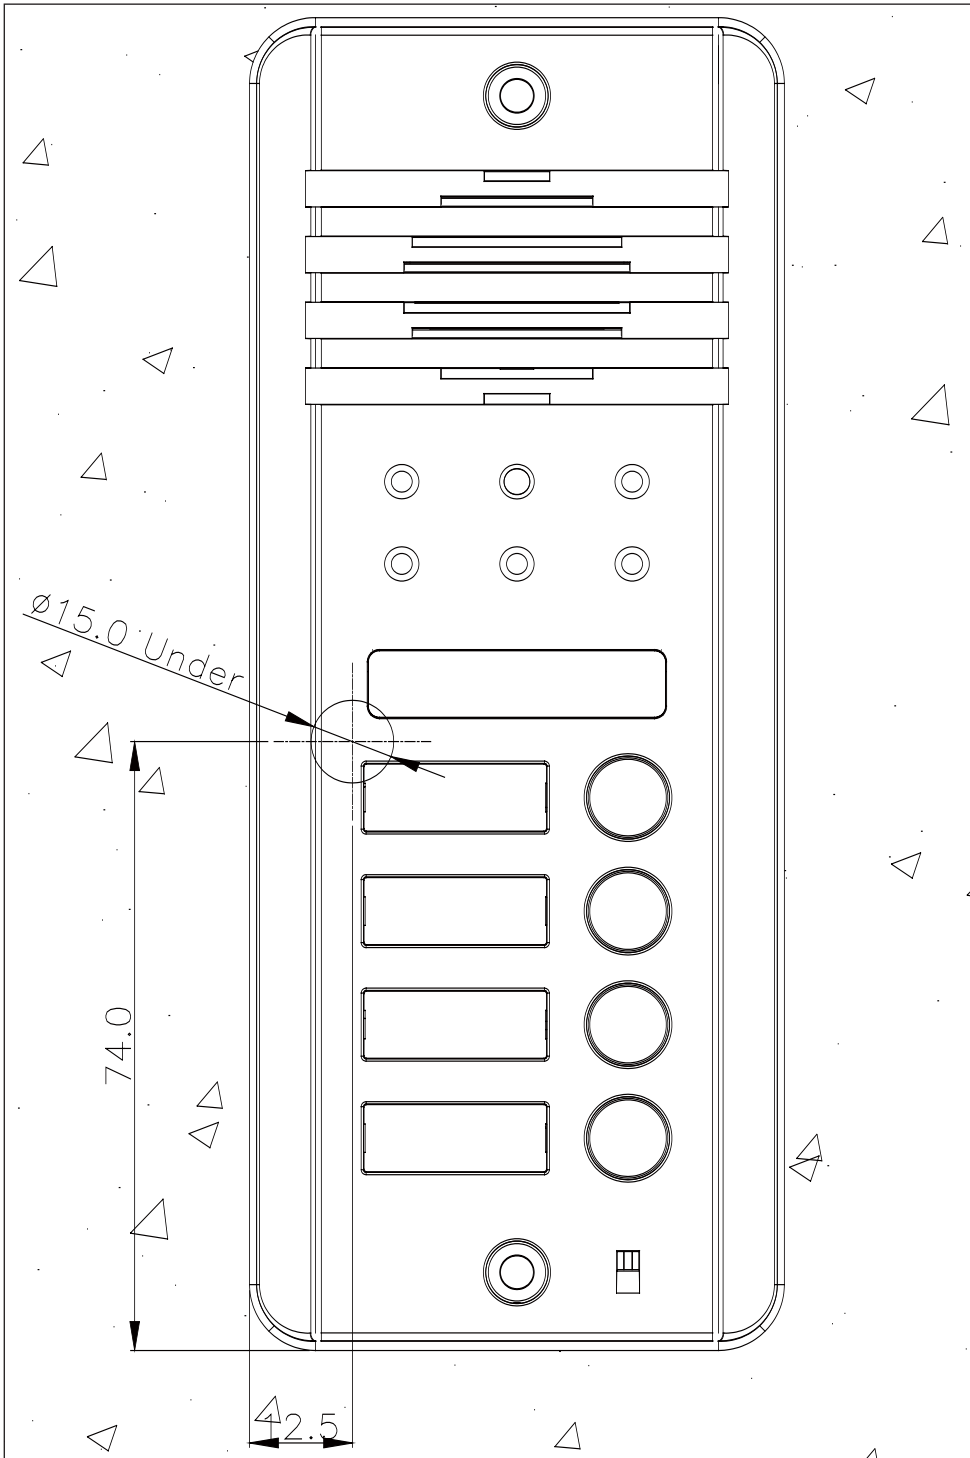


## 1. Part Names and its features

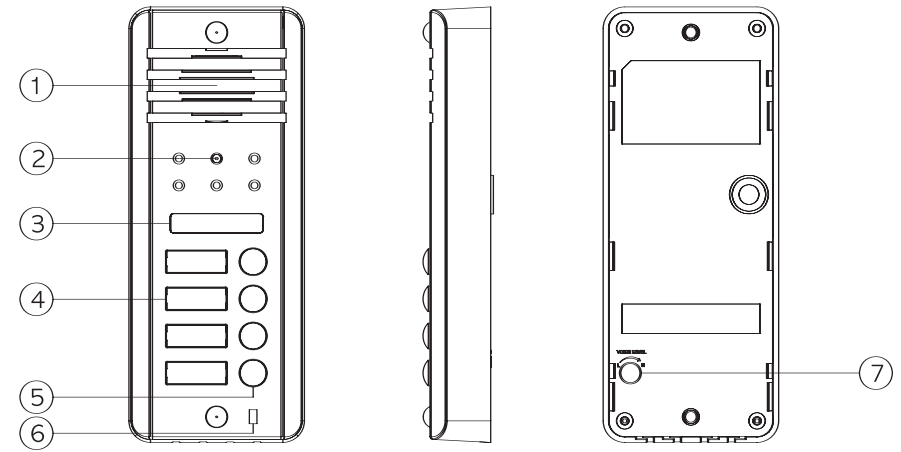


- ① Speaker : It delivers voice from video door phone.
- ② C.C.D Camera Lens : Keep clean from foreign substances
- ③ White LED : It offers clear image at night
- ④ Residence Number Tag : Put the number of each residence
- ⑤ Call button : Call a residence
- ⑥ Microphone : It delivers voice to a residence
- ⑦ Speaker volume control : Control the speaker volume according to its installation environment

## 2. Accessory

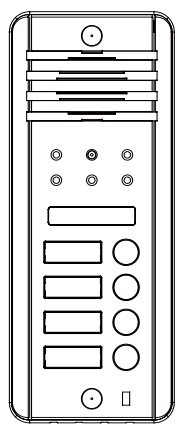


DRC-4DB/4DC



M/T HOLE CAP



VOLUME SHEET



Screw Cover





Mounting Screw



MANUAL

## 3. Wiring and Installation

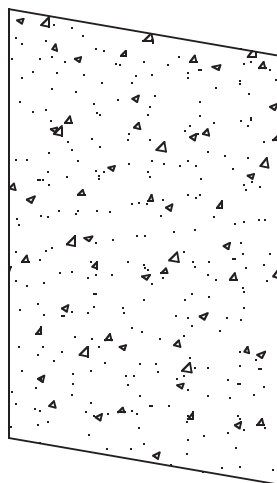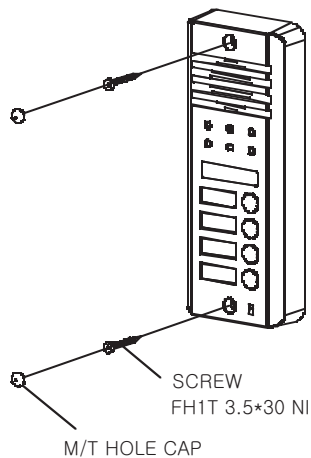

## 4. Specification

<b>Image Device (Lens)</b>	1/3" or 1/4" C.C.D				
<b>Rated Voltage</b>	DC 12V, power supplied From monitor				
<b>Wiring(Residence)</b>	4 wires in polarity(16 wires) 2 wires in non-priority(Door release)				
<b>Transmission</b>	Voice Switch				
<b>Effective Viewing Angle</b>	Horizontal 55°, Vertical : 40° (70° or 90° : Optional)				
<b>Scanning Frequency</b>	<b>RTA/NTSC</b> Horizontal: 15.734kHz, Vertical : 60Hz	<b>CCIR</b> Horizontal: 15.625 kHz, Vertical: 50Hz			
<b>LED</b>	Embedded IR LED(5 Pie) 4EA- DRC-4DB Embedded White LED(3 Pie) 2EA- DRC-4DC				
<b>Minimum Illumination</b>	0.1lux (Within 300mm from camera)				
<b>Operating Temperature</b>	-10°C ~ +40°C				
<b>Dimension(W * H * D)</b>	65.0mm x 162.0mm x 25.0mm				
<b>Weight(g)</b>	285g				
<b>Wiring Distance (TIV Cable)</b>	<b>Diameter (pie)</b>	0.5	0.65	0.8	1
	<b>Distance (m)</b>	28	50	70	115

### ※ Wiring

Caution : For a hole drilling, please refer to the annexed paper to ensure a hole position and size properly