



NAC-T521R


## 20x IR HD High Speed Dome Camera



## Features

- 1 / 3" CMOS progressive scan, 20x optical zoom
- HD-TVI video output : 1920 x 1080P@25 / 30fps
- 100m IR night view distance
- Advanced stepping motor drive
- Pan / tilt preset speed up to 240 °/s
- Video output : 1 CH HD-TVI
- IP66 ingress protection; 4KV lightning protection, surge protection
- Support address setup by dial switches or by OSD menu; easy operation

## Dimensions

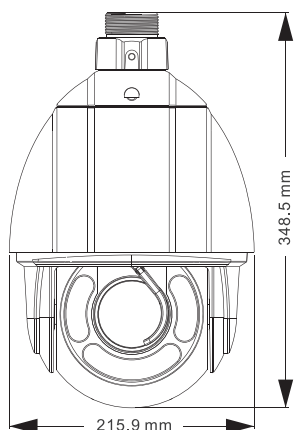

## Specifications

Specifications	Model	NAC-T521R
<b>Camera</b>		
Image Sensor		1 / 3" Inch Progressive CMOS
Effective Pixels		1920 x 1080 2Mega
Horizontal Resolution		1000 TVL
Min. Illumination		0 Lux
IR Distance		100 m
White Balance		Auto / Manual
S / N Ratio		> 50 dB
Day / Light		Auto / Manual
Focus Mode		Auto / Manual
Lens		20x Zoom, f = 4.7 ~ 94 mm, F1.6 ~ F3.5
<b>PTZ</b>		
Pan Range		360° endless rotation
Pan Speed		Preset speed : 240 °/s; Manual control speed : 0.5 ~ 90 °/s
Tilt Range		0 ~ 90° ( auto rotation )
Tilt Speed		Preset speed : 240 °/s; Manual control speed : 0.5 ~ 90 °/s
<b>System</b>		
PTZ Control		Yes
Preset		255
Patrol		8
Trace		4
Time Task		8
Scan		2
Home Position		Yes
Auto Flip		Yes
Alarm Input		7 CH ( NC / NO )
Alarm Output		1 CH
Alarm Linkage		Yes
Video Output		HD-TVI : 1.0Vp-p, 75Ω, PAL / NTSC
OSD		English
Control		RS422 / RS485, PELCO-D / PELCO-P ( It can be added according to users needs )
<b>Others</b>		
Power Supply		AC 24V / 3000 mA
Power Consumption		15 W ( max 65W, IR on, heater on )
Working Environment		Temperature : - 20 °C ~ 60 °C; Humidity : less than 95%
Protection Level		IP66; TVS 4KV lightning protection, surge protection
Weight		5 KG
Dimensions ( mm )		Φ 216 x 349